



alpha marketing

Complete Equipment Solutions.

For waterproofing and
surface preparation
professionals



Authorised Distributors

BAK



GRACO



Husqvarna

PROWLPLUG®

Injection Grouting Pumps



Graco UltraMax 390

- 0.6HP Carbon brush motor
- Two ball piston pump, with automatic cut off sensor
- Max pressure 3300psi/227bar
- Suitable for epoxy & PU materials
- Max flow rate of 1.8L/min
- Weighs 12kgs

Injection Grouting Packers



Graco UltraMax 450

- 1.1HP, Brushless electric motor
- Graco's low maintenance endurance piston pump
- Automatic cut off sensor
- Maximum pressure 3300psi/227bar
- Maximum flow rate of 2L/min
- Equipped with a digital display
- Weighs 13kgs



Syringe Injection Packers



Needle Injection Packers



HY1001

- Powered by 220V Bosch Drill
- Single ball piston pump
- Max pressure 4500psi/300bar
- Max flow rate of 500mL/min
- Suitable for medium viscosity epoxies & PU with a minimum 30 mins pot life
- Made in India
- Weighs 6kgs

Mechanical Injection Packers



HY2001

- Powered by 220V, Bosch Drill
- Single ball piston pump
- Max pressure 4500psi/300bar
- Max combined flow rate: 900mL/min
- Suitable for short pot life PUs & epoxies
- Made in India
- Weighs 9kgs
- Inline static mixer
- 1:1 ratio as standard



Pneumatic Grouting Pumps



Graco A25 Pump

Modified for Injection Grouting



Graco A25 is a pneumatic driven 1:1 ratio pump that has been modified for injection grouting. It is an air controlled 25:1 ratio pump with a max flow rate of 11.4kg/min, and 2000psi/138bar max working pressure. The two components, Part A & B are pumped separately, and combined in the mixing head before injection.

A standard package includes:

- Cart mounted A25 pump
- 2x15mts 9.5mm high pressure hose
- HD injection with static mixer

Technical Specifications

- Max working pressure: 2000psi/138bar
- Max air supply pressure: 125psi/9bar
- Maximum output: 11.4kg/min
- Hoses: 50ft x 3/8in each
- Air consumption: 28scfm at 1500psi stall pressure
- Weighs 40kgs



Graco XP Pump

High Pressure, High Volume Injection Grouting

Graco XP pumps are pneumatic two-component proportioners available in 35:1 and 50:1 ratios. The pump has been modified for injection grouting, with air-pressure control, and a maximum output of 30lpm at 60cycles/min. Working pressure varies with variant, and can go upto 5000psi/340bar.

A standard package includes:

- Cart mounted XP pump
- 2x15mts high pressure hose
- HD injection with static mixer

The Graco XP grouting pump is ideal for short pot life dual component materials, and fixed ratios such as: 1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1.



Cementitious Coatings & Mortars



Graco TexSpray FastFinish

- Pressure boosted hopper gun
- 9cfm @40psi in-built air compressor
- 50ft air hose
- Ideal for small jobs like bathrooms, balconies, residential terraces
- 4mm, 6mm, 8mm nozzles & fine finish kit
- Suitable for cement based material with aggregate upto 2mm
- Weighs 30kgs



Graco Texture Hopper Gun

- Light weight RTX Texture Gun
- 6L hopper capacity
- Nozzles: 4mm, 6mm, 8mm
- 9cfm external compressor required



Graco Pressure-Boosted Hopper Gun

- 5L hopper capacity
- Nozzles: 4mm, 6mm, 8mm, 12mm
- 9cfm external compressor required
- Fast finish kit for excellent finish



Graco TexSpray RTX5500

- 2HP, 220V brushless motor
- In-built dual piston air compressor
- Suitable for cement & fiber based waterproofing coatings & textures
- Ideal for medium to large projects and can spray 800sq.mts per day
- Standard package includes 25ft twin hose and Graco Texspray gun with nozzle
- Weighs 72kgs

Graco ToughTek S340e

- Single phase, 230V electric motor
- Suitable for gypsum, or cement based vermiculite materials, and low density rehabilitation mortars
- Also suitable for large cement grouting projects
- External compressor required for spray application
- 76L polyethylene hopper
- Max flow rate of 24L/min



Rotor-Stator Pumps



Graco ToughTek MP160

- Powder mixing pump with 75L hopper
- In-built air compressor & water boost pump fully capable of mixing and spraying powder materials
- Maximum working Ppressure: 440psi/30bar
- Maximum output: 60L/min
- Hose: 1"x 30ft/10m
- Electrical input: 400V/32A/6.05kW
- Compressor specification: 80psi, 9cfm, 250L/min
- Weight: 160kgs

Graco ToughTek MP260

- Powder mixing pump with 135L hopper and separate 1.1kW drymix motor
- In-built air compressor & water boost pump fully capable of mixing and spraying powder materials
- Maximum working pressure: 440psi/30bar
- Maximum output: 60L/min
- Hose: 1"x 30ft/10m min x 2
- Electrical input: 400V/32A/6.05kW
- Compressor specification: 80psi, 9cfm, 250L/min
- Weight: 250kgs



Graco ToughTek LP120

- Graco's solution for a Low Pressure Rotor Stator Conveying pump for mortars & textured materials
- Available with in-built compressor
- Maximum working pressure: 440psi/30bar
- Maximum output: 20L/min
- Hose length: 1"x 30ft/10m min, 1"x 60ft/20m max
- Electrical input: 230V/16A/2.4kW
- Compressor specification: 150psi, 9.5cfm, 270L/min
- Weight: 110kgs





Graco Contractor King

- XL Air motor with anti-icing technology helps you spray for long without ice formation
- Quick Change Endurance Pump for easy on job pump maintenance, reduced down-time
- Can be specified with a Silver Plus HP gun for high performance and output
- Weighs 65kgs
- Standard package: 15mtr/50ft hose pipe, 1mtr/3ft whip hose, high pressure spray gun with tip and guard

Specification	Contactor King 45:1	Contactor King 60:1	Contactor King 70:1
Air motor	XL6500		
Pump displacement	290cc	220cc	180cc
Max input air pressure	100psi/7bar		
Max working pressure	4500psi/ 310bar	6000psi/ 414bar	7250psi/ 500bar
Compressor requirement	60cfm at 90psi		
Max flow rate @60 cycles/min	17.4L/min	12.9L/min	11L/min

Graco King E-Max XT

- 230V single phase motor works at low RPM generating high torque for the most demanding application
- Graco Chromex rod & stainless steel cylinder for maximum life & performance
- Standard Kit: XTR7+ gun with tip and guard, 15mtr/50ft hose
- Weighs 155kgs

Specification	King E-Max XT 40	King E-Max XT 60	King E-Max XT 70
Max pressure	4000psi/276bar	6000psi/414bar	7250/500bar
Max flow rate	15.1L/min	12.9L/min	10.9L/min
Max tip size	0.065	0.059	0.053



PU & Acrylic Coatings



Specification	Graco TexSpray Mark IV	Graco TexSpray Mark V XT
Motor	Single phase, 1.5kW/2HP	Single phase, 2kW/2.8HP
Suitable for	Acrylic & low viscosity PU	Acrylic & all types of PU
Max flow rate	4L/min	4.6L/min
Max pressure	3300psi/228bar	3300psi/228bar
Max tip size	0.033in	0.035in
Weight	45kgs	59kgs
Package includes	Spray gun with tip & guard, 15mtr/50ft main hose, 1mtr/3ft whip hose	Spray gun with tip & guard, 15mtr/50ft main hose, 1mtr/3ft whip hose

Graco TexSpray Mark X

- 3kW/4HP single phase electric motor
- Graco Endurance Chromex Pump for long-life
- Max flow rate: 8L/min at 3300psi/228bar max working pressure
- Suitable for acrylic and PU coatings, with upto 75% volume solid
- Max tip size: 0.045in
- Weighs 70kgs
- Package includes: Heavy-Duty Spray gun with tip & guard, 15mtr/50ft hose, 1mtr/3ft whip hose



Graco TexSpray Mark XV XT

- 5kW/6.7HP single phase electric motor
- Graco Endurance Chromex Pump for long-life
- Max flow rate: 10.6L/min at 3300psi/228bar max working pressure
- Suitable for acrylic and PU coatings, with upto 85% volume solid
- Max tip size: 0.053in
- Weighs 65kgs
- Package includes: Heavy-Duty Spray gun with tip & guard, 15mtr/50ft hose, 1mtr/3ft whip hose



Graco Airless Spray Guns

Contractor PC

XTR

Inline

Flex Plus

Silver Plus



Short Pot Life Coatings



Graco A-25


- Air operated 1:1 ratio pump
- Graco engineered for spray insulation foaming
- Constant output pressure for uniform pattern
- 9kw in-built heaters for material & hose pipe
- Weighs 113kgs
- Graco AirPurge gun for fast setting 2K materials.
- Max working pressure 2000psi/137bar
- Max flow rate 12 kg/min

AP Gun Chambers



- Suitable for small 1:1 ratio polyurea jobs
- Works on 240V single phase supply
- 24kg capacity insulated tank each Part A&B
- 35ft non heated insulated hose
- Weighs 108kgs
- Max working pressure 2500psi/172bar
- Max flow rate of 3.8L/min

Graco Reactor E-10hp

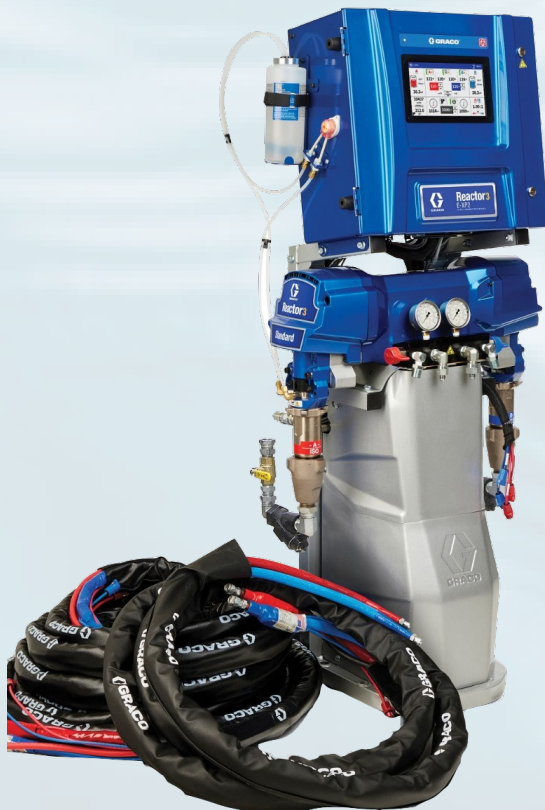

Graco Reactor 3 E-XP2

- 3 phase electrically operated
- Standard package is 1:1 ratio, with variable ratio optional
- On board data tracking & diagnostics
- 15kw in-built heaters independent for material & hose pipe temperature control
- Weighs 143kgs
- Graco AirPurge gun for fast set 2K materials
- Max working pressure 3500psi/206bar
- Max flow rate 7.6L/min

Graco AP Fusion Gun

- Graco's most popular plural component gun for polyurea & polyurethane foam
- Available as flat or round nozzles and 10-18in pattern size



Short Pot Life Coatings



Image shows XP with side hoppers

XP Plural Component Sprayer

- Short pot life 2 component sprayer
- Multiple fixed ratio available- 1:1, 1.5:1, 2:1, 2.5:1, 4:1, 3:1
- External air compressor required to run Graco NXT Air Motor
- Non-heated hoses with fusion SP gun
- Suitable for high-viscosity, high-solid coatings
- Max flow rate 7.2L/min
- Max working pressure 7250psi/500bar
- Dual hopper holds 26L of each component
- Viscous material heater, transfer pumps, circulation kit & solvent flushing pump are optional attachments

Blade Bung Agitator



Transfer Pumps



Image shows XP with transfer pumps

Graco E-MIX XT

- Three phase electrically operated, no compressor or transfer pumps needed
- Dual 26L hoppers with solvent flush pump
- Variable mix ratio ranging from 1:1 to 6:1
- On board data tracking & diagnostics
- 25ft x 3/8" Mix hose + 10ft x 1/4" whip hose
- Package includes XTR5+ gun & XHD tip
- Max working pressure 5000psi/345bar
- Max flow rate 5.7L/min
- Weighs 192kgs



Husqvarna BMP Series Scarifiers are powered by electric motors and benefit from an ergonomic design that makes it easy to use for prolonged periods. Each scarifier comes fitted with a standard cutting drum that can be adjusted for depth.



Husqvarna BMP 215

- Working width: 215mm/8.5in
- Productivity: 70m²/h
- Motor: 1.8kW/230V-50Hz/16A single phase
- Rotational speed: 1,700RPM
- Works dust free with Husqvarna Dust Collectors
- Weighs 63kgs




Husqvarna BMP 265


- Working width: 265mm/10.5in
- Productivity: 120m²/h
- Motor: 5.5kW/400V-50Hz/16A single phase
- Rotational speed: 1,500RPM
- Works dust free with Husqvarna Dust Collectors
- Weighs 175kgs

Scarifier Drum

120 pieces
Carbide Cutter

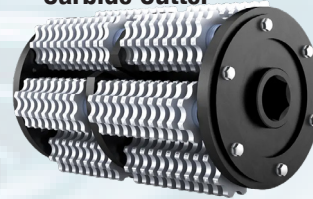

42 pieces
Miller Cutter

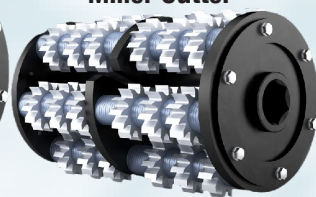

Husqvarna DE 130H Dust Collector

- Single phase motor: 3kW/230V/15A
- Maximum vacuum pressure: 275mBar
- Twin HEPA filters with 99.99% suction
- Peak air flow: 415m³/hr
- Use with Husqvarna Floor Scarifiers
- Weighs 48kgs



Surface Preparation Equipment



Husqvarna Shot Blasters are powered by electric motors and benefit from an ergonomic design that make them easy to use for prolonged periods. Husqvarna shot blasters use a controlled stream of steel abrasive to profile and clean concrete surfaces, with blast intensity that can be adjusted to suit the application.

Husqvarna 1-8DPS30 Shot Blaster

- Working width: 200mm/8inches
- Blasting capacity: Upto 50m²/h on concrete
- Motor: 3kW/400V-50Hz/16A three phase
- Speed: Upto 23m/min
- Abrasive consumption: 10-75gram/m²
- Works dust free with Husqvarna Dust Collectors
- Weighs 145kgs



Husqvarna 1-10DPS75 Shot Blaster

- Working width: 250mm/10inches
- Blasting capacity: Upto 75m²/h on concrete
- Motor: 7.9kW/400V-50Hz/16A three phase
- Peak productivity: 120m²/hr
- Abrasive consumption: 10-75gram/m²
- Use husqvarna specified dust collector
- Weighs 211kgs



Husqvarna T-7500 Dust Collector

- Three phase motor: 5.5kW/400V-50Hz/16A
- Maximum vacuum pressure: 280mBar
- Peak air flow: 600m³/hr
- Use with surface grinders & shot blasters
- Weighs 206kgs



Husqvarna Single Disc Surface Grinders run a single rotating grinding head fitted with interchangeable diamond tooling. Their smaller footprint makes them easy to work into corners, edges, and confined spaces - ideal for smaller floor areas, coating removal, and touch-up grinding where a larger machine cannot reach.

SINGLE DISC FLOOR GRINDERS



Specification	PG400	PG280S
Motor	4kW, 400V, 5.4hp	2.2kW, 230V, 2.9hp
Grinding width	400mm	280mm
Grinding pressure	59kg	25kg
Disc speed	1450rpm	1400rpm
Weight	110kg	76kg

Filters for Dust Collectors



Husqvarna S26 Dust Collector

- Single phase motor: 2.4kW/230V/15A
- Maximum vacuum pressure: 220mBar
- Peak air flow: 321m³/hr
- Use with Husqvarna surface grinders
- Weighs 47kgs



Husqvarna Grinding Tools

- **Elite-Grind EZ T-Rex** - for removal of APP membrane, coatings, paint, and epoxy
- **Vari-Grind EZ** - for concrete grinding, mid-range offering with reliable performance and better value
- **Vari-Grind EZ T-Rex** - for removal of coatings & epoxy
- **Tacti-Grind EZ** - entry level concrete grinding offering

Surface Preparation Equipment



Husqvarna Planetary Surface Polisher run multiple counter-rotating grinding heads simultaneously, covering more floor area per pass than a single disc machine. This makes them the preferred choice for large commercial and industrial floors, concrete polishing, and coating removal where speed and finish consistency matter most.



Husqvarna PG 5 Planetary Grinder

- 4kW/5.3hp, three phase motor
- 230mm grinding disc diameter
- Grinding width: 515mm
- Number of grinding discs: 3
- Maximum disc speed: 1,176rpm
- Weighs 183kgs
- Use with DE 130H Dust Collector for 99% dust free grinding



Husqvarna PG 5S Planetary Grinder

- 2.2kW/2.9hp, single phase motor
- 230mm grinding disc diameter
- Grinding width: 515mm
- Number of grinding discs: 3
- Maximum disc speed: 1,176rpm
- Weighs 169kgs
- Use with DE 130H Dust Collector for 99% dust free grinding



Husqvarna Polishing Tools

- **Elite-Polish** - premium range for initial concrete polishing to final high-gloss on floors, natural stone, granite, and cementitious overlays
- **Vari-Polish** - mid-range concrete and wood polishing range
- **Tacti-Polish** - entry-level tools for concrete polishing





Husqvarna DXR 305

Heavy duty demolition robot for large-scale structural demolition, heavy concrete breaking, and industrial demolition work

- 27kW, Three phase 440V power supply
- Remote controller runs on Li-ion battery
- Wireless transmission up to 300m
- Extended hydraulic function, cylinder protection, enhanced cooling, & heat protection
- 5.2m vertical, 4.9m horizontal reach
- Weighs: 2050kg



Husqvarna DXR 145

Compact demolition robot for confined spaces, where job requires a maneuverable and compact machine with high demand of demolition efficiency

- 18.5Kw, three phase 440V power supply
- Remote controller runs on Li-ion battery, wireless transmission up to 300m
- Extended hydraulic function & cylinder protection
- 4.4m vertical, 3.7m horizontal reach
- Weighs: 1050kg



Husqvarna Demolition Tools & Attachments for Robots



Fasteners & Nailing Equipment



RawlPlug Electric Nailing Gun

RawlPlug's battery powered nailer is the perfect solution to nailing for anchoring, and supporting. This nailing gun is capable of firing nails up to 40mm long into concrete and steel. The machine uses an 18V battery to generate enough force to perfectly fix the nail within the media.

Features

- Nails range from 15mm to 40mm
- Simplified depth adjustment for accurate depth control
- Compact and ergonomic design
- Less recoil ensures user safety
- Low weight reduces operator fatigue
- Safe pressure activation when pressed against a surface

Gun set includes:

- RawlPlug battery powered nailer
- Lithium ion battery & charger
- Safety goggles and ear plugs
- Carry case



Applications:

- Cable conduits and wire installations
- Fixing PVC, TPO, membrane to concrete surfaces
- Installation of clips and clamps into concrete, and drywall

Battery Powered Sealant Dispensing Guns



High Power Hammer & Rotary Drill



MECHANICAL & CHEMICAL FASTENERS



Hot Air Welding Machines

ProtOn Air is a small, and lightweight automatic double seam plastic welding machine that is ideally suited for tunnelling jobs. It can be used to weld HDPE, PVC, TPO, and Geomembranes

- Small, lightweight, and robust
- Brushless drive and heater motor
- Stepless adjustment for all welding parameters
- Key Specification:
 - Double seam welder
 - Voltage: 230V/15A/Single phase
 - Power: 2200W
 - Maximum temperature: 550°C
 - Maximum welding speed: 5m/min
 - Maximum welding pressure: 1200N
 - Weighs 9.8kgs



ProtOn Wedge, a small and light compact wedge welder to weld all different kinds of thermoplastic geomembranes



Key Specification:

- Double seam welder
- Voltage: 230V/15A/Single phase
- Power: 900W
- Maximum temperature: 420°C
- Maximum welding speed: 2.5m/min
- Maximum welding pressure: 1200N
- Weighs 9.5kgs

ComOn Wedge is a strong and fast wedge welder with an excellent price to performance ratio. ComOn's versatility, performance, and robustness make it suitable for the most demanding job sites

Key Specification:

- Double seam welder
- Voltage: 230V/15A/Single phase
- Power: 1700/2100W
- Maximum welding Speed: 10m/min
- Maximum welding pressure: 1500N
- Wedge length: 100mm
- Maximum temperature: 460°C
- Weighs 18.5kgs



Hot Air Welding Machines





Laron 21, an easy to handle and user-friendly machine due to its optimal design and balance. This welding machine is among the best and fastest in the commercial roofing industry

- Digital display for temperature, voltage, and speed before operation
- Brushless motor makes continuous operation seamless
- Stepless adjustment for airflow, temperature, and speed
- Key Specification: - Voltage: 230V/15A/Single phase
 - Power: 3600/5700W
 - Maximum temperature: 620°C
 - Maximum welding speed: 21m/min
 - Weighs 37kgs



RoofOn is the most compact automatic hot air welding machine for all thermoplastic roof materials. A digital display and robust drive mechanism ensure easy use and optimum performance. Includes a 40mm roller for wrinkle-free seams and stepless digital adjustment for all parameters

- Key Specifications: - Voltage: 230V/15A/Single phase
 - Power: 2900/3400W
 - Maximum temperature: 600°C
 - Maximum speed: 12m/min
 - Maximum air flow: 500L/min
 - Weighs 15kgs

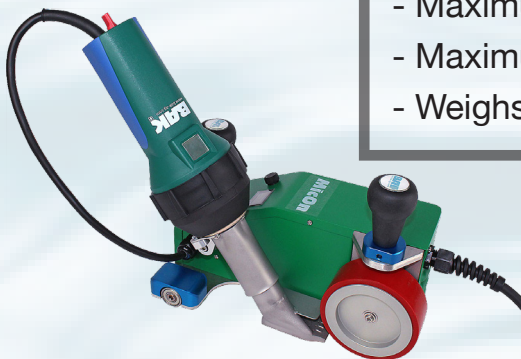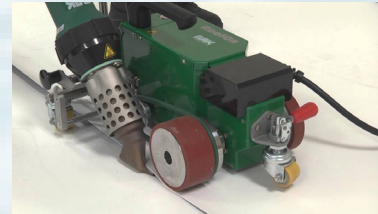

MicOn is an economical hot air welding machine that bridges the gap between fully automatic, and manual welding. The machine can be specified with a 30/40mm

weld seam. The MicOn comes with a metal handle which provides walking support

- Innovative, lightweight machine with stable and robust design
- Stepless adjustment for speed and temperature
- Constant temperature and speed with manual pressure
- Key Specifications: - Voltage: 230V, Single phase
 - Power: 1700/2100W
 - Maximum speed: 4m/min
 - Maximum temperature: 600°C
 - Weighs 6.8kgs



Hot Air Welding Accessories



RiOn 2 Brushless Hot Air Tool

High performance, Swiss-made handheld hot air welding tool for welding plastic materials and detailing work

- Voltage: 230V/15A/Single phase
- Power: 1600W
- Maximum temperature: 650°C
- Maximum air flow: 250L/min
- Available with digital display for temperature & airflow control
- Weight: 1.2kgs



Nozzles available in various sizes ranging from 5mm to 40mm in pushfit & screw-on for membrane welding and heaters (upto 150mm)

RotOn grooving tool


- Suitable for cutting welding grooves into floor coverings and along walls
- Multiple cutting speeds with dust fan for reduced dust generation
- Simple blade replacement process for high uptime
- Single phase 230V/350-700W



Pressure Rollers available in 5mm Brass and 28/40/80mm Silicon

Stand-up Membrane Slitter- easily cut roofing membrane

- Cuts straight or curved lines
- Yellow pointer helps user follow scribed lines
- Long 32" handle is easy to hold and ergonomically designed
- Equipped with easily removable blade cartridge
- Weighs 7kgs

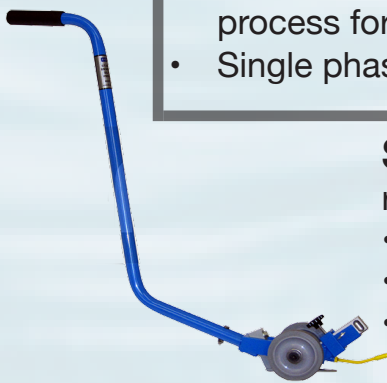

Seam Tester




Seam Probe



Heavyduty Membrane Rollers- eliminate bubbles, waves, folds, or crisps and easily roll out membrane systems

- Rollers cast with heavy metal for maximum pressure
- Useful for field and sidelap areas of thick membranes
- 32" long handle with rubber grips for enhanced ergonomics
- 6" and 17" wide rollers available

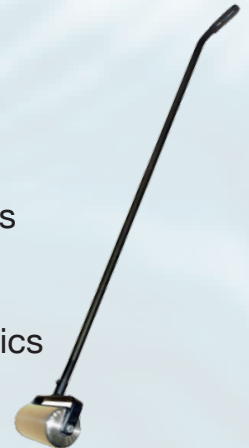




Graco 4240 Pressure Washer

- 390cc Honda petrol engine
- 15L flow rate for high pressure cleaning
- Operating pressure 4200psi/290bar
- Multiple interchangeable nozzles
- Weighs 40kgs

Pressure Washer Spray Tips

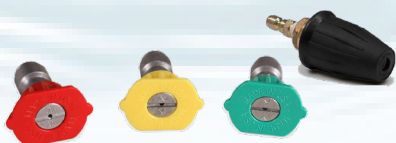

Electric High Pressure Washer

- Suitable for high pressure rapid cleaning
- 440V, 3phase Electric motor
- Weighs 80kgs

Motor	5hp/3.7kW	7.5hp/5.6kW
Max pressure	200Bar	250Bar
Max flow rate	12lpm	15lpm




Husqvarna BHG125-G5 Hand Grinder

- Single phase electrical grinder specially designed and configured for optimal grinding performance
- Grinding width: 125mm
- Maximum grinding speed: 9,000RPM
- Weighs 5.75kgs

Pneumatic Long Reach Scraper

- Suitable for scrapping of ceramic tiles, roofing material, paint & adhesive material
- Fast interchangeable blades
- 5 cfm air required

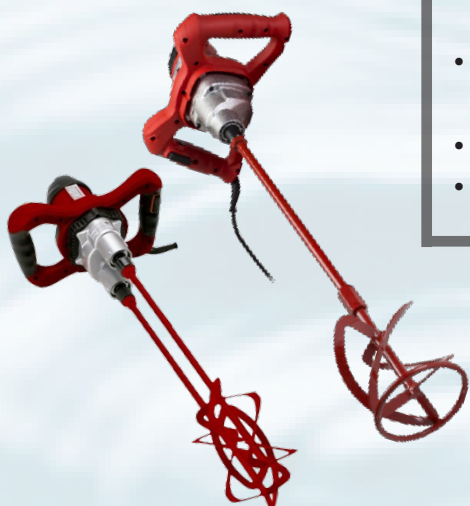

Handheld HD Mixers

- 230V, electrically operated mixer
- Mixer diameter 120mm
- Spindle length 550mm
- Available in single and double spindle configurations
- Multiple speed control



Graco GrindLazer DC21E Handheld Scarifier

- Electric handheld scarifier for small surface preparation jobs
- Powered by 230V/1HP heavy duty Makita drill
- Carbide and steel blades for fine, medium, coarse profile
- 50mm/2in cutting width
- Weighs 7kg



Floor Coating Roller




Extension Rod



Spike Shoes



Spike Roller



Pin Rack Trowel



Block Brush



Notched Epoxy Blade




Floor Brush



Wire Brush



Sealant Gun



Notched Trowel



Grout Scraper

**For Sales & Services, Contact
ALPHA MARKETING**

C-199, Naraina Industrial Area, Phase-1,
New Delhi, India-110028

support@alphaeqpt.com, anurag@alphaeqpt.com
+91-9811781281, 9810146910, 011-45578023
www.alphaeqpt.com